

# [LINK]

## TRUNKABLE LED BATTEN



### Description

The [LINK] is a unique trunkable LED batten which connects seamlessly for runs of up to 42m from a single connection point. Constructed to be a versatile solution for retail and commercial applications, the [LINK] has numerous mounting options matched with premium components for reliable long life performance.

### Easy Installation

Seamless end-to-end mounting with connectors included.



### Key Features

- Multiple mounting options
- 5 year warranty with  $\geq 50,000$  hour life
- 42m run lengths
- Premium aluminium body for improved heat dissipation
- Tri-colour (3000K/4000K/5700K)

### INCLUDED ACCESSORIES



#### Includes:


- 2 x Mounting Clamp
- 1 x 2 Piece Connector Mount
- 1 x Suspension Cable (1m)
- 1 x AC Linkable Connector
- 1 x Cable Length Adjusting Wall Mount
- 2 x Wall Plug
- 2 x Screw
- 1 x Electrical End Cap



### Technical Specifications

Rated Life	≥50,000 hours	Operating Temperature	-20°C to +40°C
Body	Aluminium	Input Voltage	100-265 VAC ~ 50/60Hz
Installation	Surface Mounted, Suspension	IP Rating	IP42
Beam Angle	120°	Connection	Flex/Connector (1.5m)
Power Factor	>0.95	Net Weight	0.7kg (20W) 1.26kg (36W) 1.61kg (50W)
CRI	>80		

### Dimensional Drawing

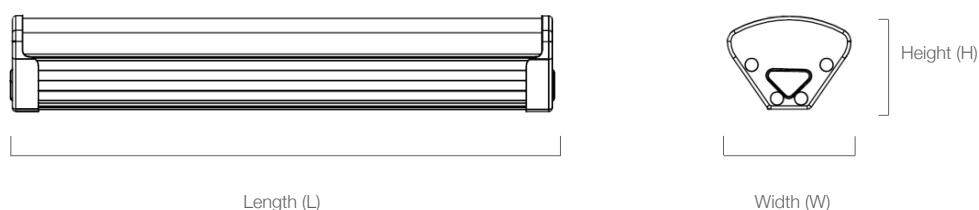

Wattage	Maximum Trunkable Pieces	L	H	W
20W	70	600	72	54
36W	35	1200	72	54
50W	28	1500	72	54

Unit = mm

### Product Data

Part Number	Power	Lumen Output	CCT
BL-2-20S120* <i>(shift:)</i>	20W	2500-2700lm	Tri-colour (3000K / 4000K / 5700K)
BL-4-36S120 <i>(shift:)</i>	36W	4500-4860lm	Tri-colour (3000K / 4000K / 5700K)
BL-5-50S120* <i>(shift:)</i>	50W	6250-6750lm	Tri-colour (3000K / 4000K / 5700K)

\* Available via special order