

[RIPPLE]

SMD DOWNLIGHT



Description

The [RIPPLE] is designed to replace metal halide and PLC fittings. Available in three sizes, the [RIPPLE] provides improved lighting over traditional halide lamps and a hassle-free installation due to its slim profile and high quality stainless steel spring clips.

Premium Heat Sink

Low operating temperature to ensure long lifetime.

Key Features

- Low profile body designed for “hassle-free” installation
- Cast aluminium heat sink for extended lifespan
- Recessed diffuser to minimise glare
- Utilising tier 1 components for a long service life of $\geq 50,000$ hours

Durable Clip

Spring clips for quick and easy installation.




Technical Specifications

Rated Life	≥50,000 hours	Operating Temperature	-10°C to +40°C
Body	Aluminium	Input Voltage	100-265 VAC ~ 50/60Hz
Installation	Built-in spring clips	IP Rating	IP44 (Luminaire)
Beam Angle	120°	Connection	Flex and plug (1.5m)
Power Factor	>0.95	Net Weight	0.35kg (5") 0.52kg (6") 0.72kg (8")
CRI	>83		

Dimensional Drawing

Model	Dia.	H	C
5"	Ø157	52	Ø145±5
6"	Ø195	53	Ø175±5
8"	Ø230	53	Ø215±5

Unit = mm

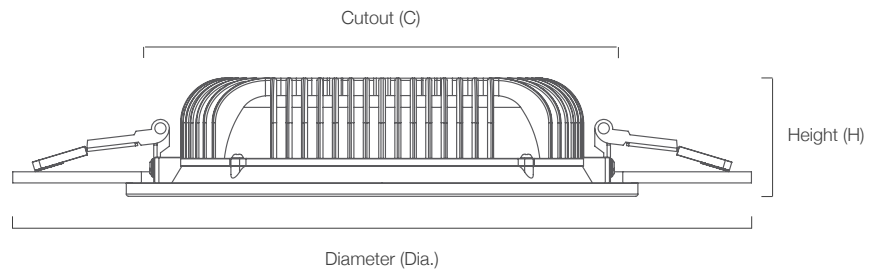

Product Data

Part Number	Power	Lumen Output	CCT	Dimensions
DR-5-15W120T	15W	1350lm	3000K	Ø157 X 52 (5")
DR-5-15C120T	15W	1400lm	4000K	Ø157 X 52 (5")
DR-5-15D120T	15W	1350lm	5500K	Ø157 X 52 (5")
DR-6-15W120T	15W	1400lm	3000K	Ø195 X 53 (6")
DR-6-15C120T	15W	1500lm	4000K	Ø195 X 53 (6")
DR-6-15D120T	15W	1500lm	5500K	Ø195 X 53 (6")
DR-6-20W120T	20W	1900lm	3000K	Ø195 X 53 (6")
DR-6-20C120T	20W	2000lm	4000K	Ø195 X 53 (6")
DR-6-20D120T	20W	2000lm	5500K	Ø195 X 53 (6")
DR-8-22W120T	22W	2100lm	3000K	Ø230 X 53 (8")
DR-8-22C120T	22W	2200lm	4000K	Ø230 X 53 (8")
DR-8-22D120T	22W	2200lm	5500K	Ø230 X 53 (8")
DR-8-28W120T	28W	2800lm	3000K	Ø230 X 53 (8")
DR-8-28C120T	28W	2800lm	4000K	Ø230 X 53 (8")
DR-8-28D120T	28W	2800lm	5500K	Ø230 X 53 (8")