

[ROMEO]

LED CEILING LIGHT

USER MANUAL



INDOOR USE ONLY



Teknik Lighting Solutions Pty Ltd
ABN: 44 608 397 913
Tel: 1300 313 780
www.tekniklighting.com.au

INTRODUCTION

Thank you for selecting our TEKNIK [ROMEO] LED Ceiling Light. Please ensure that you install and use the product according to the below instructions. Failure to follow these instructions may void the warranty. Teknik Lighting Solutions Pty Ltd will not be liable for inappropriate use, incorrect installation or any associated damage caused by incorrect installation or usage of the product.

- 3 year warranty
- Simple installation
- Tri-colour adjustable with user friendly switch
- Extra large terminal block
- Wattage selectable
- IP40 resistant to dust and insects
- Centrally located cable entry


PRECAUTION

1. Please read the entire manual carefully before installation and operation.
2. The warranty period is three (3) years from the date of purchase. Teknik, at its discretion, will repair or replace the product if it fails or becomes defective during normal use within the prescribed warranty period.
3. Declared lumen output is based upon measurements obtained under standardised laboratory conditions.
4. Designed for residential and commercial use.
5. Installation must be performed by a licensed and qualified electrician.
6. Instant restart is allowed.
7. Use solid copper wire of 18 AWG (minimum) for the input terminal extension, and 20 AWG (minimum) for the output terminal extension.
8. Do not modify or tamper with the luminaire. This may make the luminaire defective and unsafe, and will void the warranty.
9. Please do not insert any objects into the luminaire as this may result in electric shock, malfunction or damage to the product.
10. During normal operation of the luminaire the body temperature may rise to between 50° C and 60° C. This is normal.
11. The luminaire shall under no circumstances be covered by insulating materials.

NOTES

1. In case of weight discrepancy when replacing old lamps, please ensure that the mounting structure is rated to withstand the weight of the new lamp and installation materials.
2. For further information, please contact Teknik (www.tekniklighting.com.au) or your local distributors.

DIMENSIONS

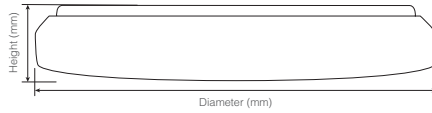


Model	Diameter mm	Height mm	Weight kg
OR-330-20S120	Ø330	65	0.59
OR-380-30S120	Ø380	65	0.78




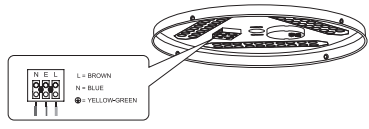

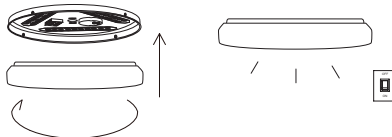
INSTALLATION DIAGRAM

WARNING:

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Installation and maintenance to be undertaken by professional electrician.



**Turn Off
Power Supply**

<p>1</p> <p>Unbox [ROMEO] light and accessory pack.</p>	<p>2</p> <p>Insert the wall plugs in the plastic anchor into the ceiling.</p> 	<p>3</p> <p>Rotate to separate lamp shade and base plate</p> 
<p>4</p> <p>Surface mount the base plate to the ceiling.</p> 	<p>5 Wiring diagram</p> 	
<p>6</p>  <p>Use sliders to select CCT of 3000K, 4000K or 5700K and Wattage of either 100% or 50%.</p>	<p>7</p>  <p>Rotate to unite the diffuser and the base plate.</p> <p>Installation complete</p>	

DISCLAIMERS

1. This product must be installed and used as per these instructions.
2. This product contains no serviceable parts and no attempt should be made to repair this product. If the product has a fault, it should be returned to Teknik or the point of sale.
3. Electrical installations periodically receive transient over voltages. This product has been designed to minimise the effect of such voltages on connected equipment. It may not give full protection for extreme over-voltage transients such as those resulting from a close lighting strike.
4. This product has been designed to operate in ambient temperatures: -20°C to 45°C.
5. Teknik reserves the right to modify the specification of this product at any time.