

[AURA]

GEN 2 LED FLOODLIGHT



Description

The [AURA] Gen 2 LED Floodlight provides superior area lighting in a variety of unit sizes and wattages. The sleek design and angled bracket make it quick and easy to install across any commercial or residential application.

Key Features

- Slim design for easy installation
- High quality powder coated finish
- Swivel bracket for versatile mounting
- User-friendly installation with flex and plug



Flexible Installation


Angled bracket to allow easy installation with power tools.

Technical Specifications

Rated Life	≥30,000 hours
Body	Powder Coated Aluminium
Installation	Adjustable Bracket
Beam Angle	110°
Power Factor	>0.9


CRI	>80
Operating Temperature	-20°C to +40°C
Input Voltage	220 - 240 VAC ~ 50/60Hz
IP Rating	IP65
Connection	Flex & Plug (1m)

Dimensional Drawing

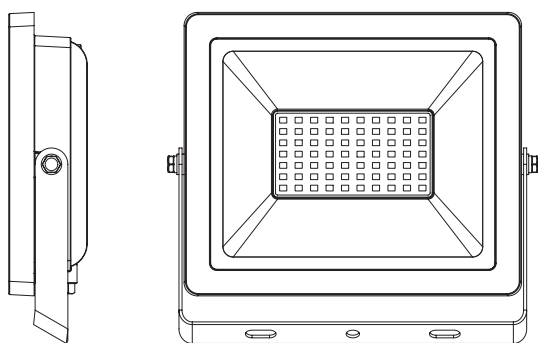

Model	Length mm	Width mm	Height mm	Weight kg
FA-30D110-G2	139	126	35	0.38
FA-50D110-G2	181	162	38	0.68
FA-100D110-G2	280	281	50	1.83
FA-200D110-G2	352	340	59	2.80

Photometry

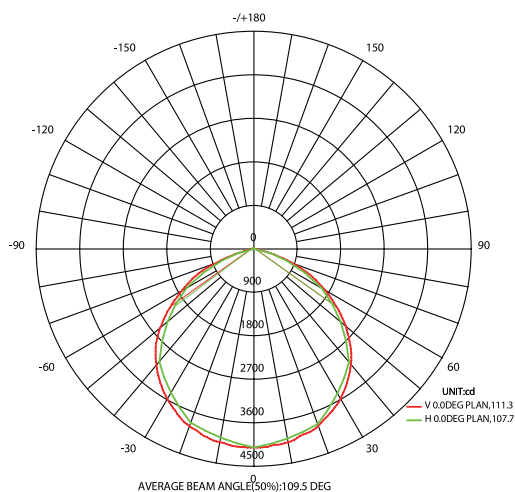

Product Data

Part Number	Power	Lumen Output	CCT
FA-30D110-G2	30W	2850lm	5000K
FA-50D110-G2	50W	4500lm	5000K
FA-100D110-G2	100W	9000lm	5000K
FA-200D110-G2	200W	18,000lm	5000K