



[ROMEO]

GEN 2 LED CEILING LIGHT



Description

A sleek, modern outlook combined with colour and wattage selection ensures the [ROMEO] Gen 2 will suit any application. Sealed with an IP54 rating to protect against dust and bugs.

With easy colour and wattage switching, the [ROMEO] Gen 2 is a versatile LED ceiling light. Its flush mounting system is designed to suit a range of different residential and commercial settings.



Key Features

- Tri-colour adjustable with user friendly switch
- Wattage selectable
- Flicker free driver for visual comfort
- Large terminal block (PA16)
- IP54 resistant to dust and insects
- Centrally located cable entry

Colour & Wattage Selectable

Switchable colour temperature and wattage for versatile installation

ACCESSORIES FOR Ø330 MODEL



Trim Ring - White

Model No.	OR-330-RING-WH
Size	Ø335 x 24mm
Material	Steel
Colour	White




Trim Ring - Black

Model No.	OR-330-RING-BK
Size	Ø335 x 24mm
Material	Steel
Colour	Black


Technical Specifications

Rated Life	≥30,000 hours	CRI	>80
Body	Steel & PMMA	Operating Temperature	Ta40°
Installation	Surface Mount	Input Voltage	220 - 240 VAC ~ 50/60Hz
Beam Angle	120°	IP Rating	IP54
Power Factor	≥0.9	Connection	PA16 Terminal Block

Dimensional Drawing

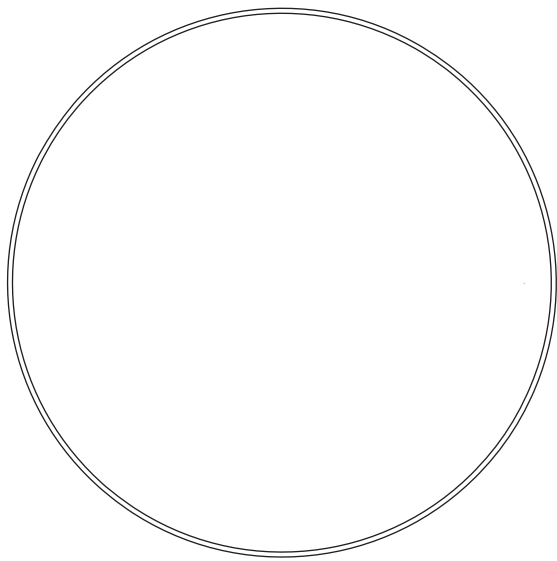

Diameter (mm)

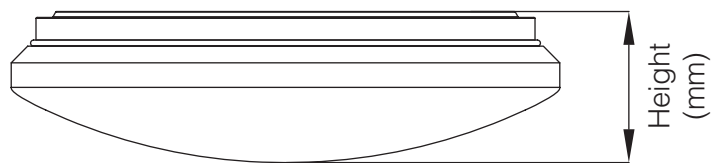

Height (mm)

Model	Diameter mm	Height mm	Weight kg
OR-330-20SW-G2	Ø330	85	0.55
OR-400-30SW-G2	Ø400	87	0.75

Product Data

Part Number	Power	Lumen Output	CCT
OR-330-20SW-G2	10W/20W	900lm-1800lm	3000K/4000K/5700K
OR-400-30SW-G2	15W/30W	1350lm-2700lm	3000K/4000K/5700K